

1. APP Installation

Support OS: Android & IOS (V4.1 version)

1. APP install:

For Android:



Search "ENNIE BELL" in the HIMARKET APP store or Scan the QR Code which on the back of this wifi video doorbell then download and install it . (If no HIMARKET APP store on your mobile device, please search HIMARKET APP store and then install it first)



For IOS:



Search "Ebell" in the IOS app store or scan the QR code which on the back of this wifi video doorbell, then download and install it.



2. After installation, it appears icon  or  ,click ENNIE BELL or WI FI to run the wifi video doorbell APP.

2. Hotspot Configuration

Connect power supply to start the equipment (start time approx 35 seconds), then heard voice hint: "welcome to the smart phone", wait for about 35 seconds (sometimes more than 35 seconds), then the calling led will flash quickly, now press the calling button approx 5 seconds, there an voice hints "enter into the network configuration mode, please complete the network configuration within 5 minutes" (if no voice hints, please press the calling button again approx 5 seconds). When heard this voice hints, then click the "WLAN" setting on your mobile device, found "GBELL-XXXXXX" device (like as picture), choose wifi hotspot connection; click "GBELL-XXXXXX" device, enter the initial password (default password: 123456789), select "Connect."

If it is not successful, can re-connect power supply to operate again.

(Note: Must remove the power supply, then re-connect it)

Important Prompts:


1. It needs about 35 seconds to complete the device starts when power on or restart the system every time, don't make any operation at this time.

2. It will back to factory default settings when reset.



4. Connect Router

Note: If you are connected via network cable to router, please ignore this step, can enter directly into the APP interface. Click  icon to enter into setting interface. Click "WIFI Settings" to select the target router, put password, the device will restart, a voice hints "device start successful, welcome" after 35 seconds, then click "Online" icon to enter the intercom interface.

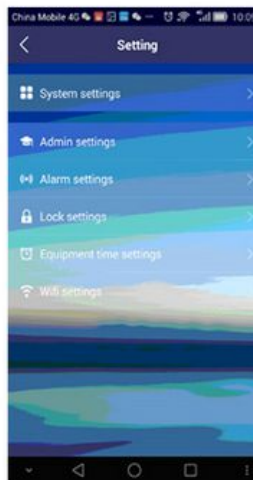

**There is a live demo for this wifi video doorbell,
if you want to see it,please send an email to below mail box:
mountainone31@163.com , then we will send the
device ID,user name and password to check the live demo.**

