



HappyModel

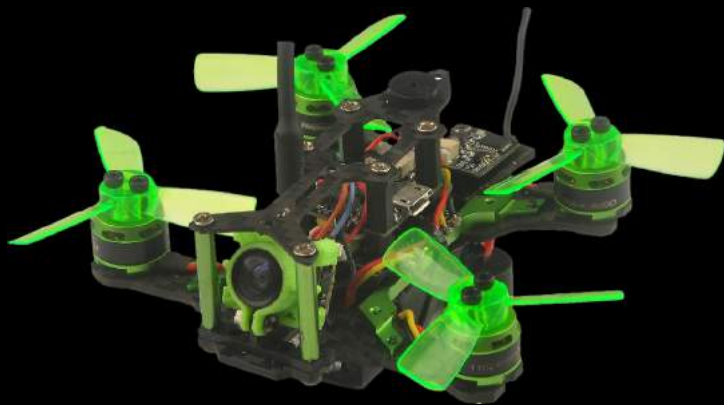

MANTIS 85

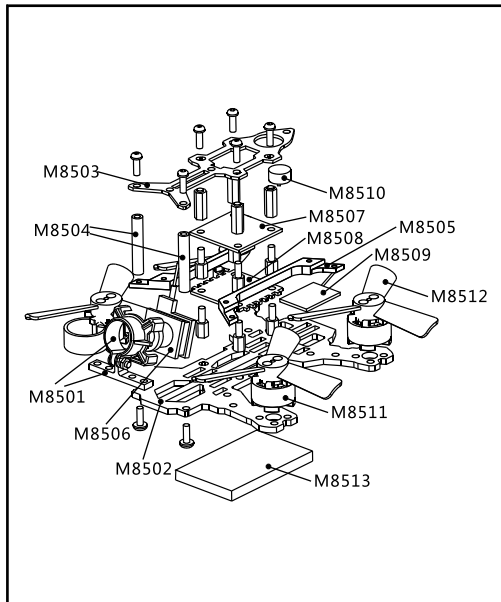

Item	Qty	Part No.	Option
Camera mount	1	M8501	
3K Carbon Main Plate	1	M8502	
3K Carbon top Plate	1	M8503	
CNC Alloy Pillar	2	M8504	
CNC Alloy Fixed Plate	2	M8505	
5.8G VTX+Camera	1	M8506	
Flight controller	1	M8507	
BS06D 4IN1 ESC	1	M8508	
2.4G Receiver	1	M8509	M8509FR: FRSKY
			M8509FL: FLSKY
			M8509DX: DXM2/X
Buzzer	1	M8510	
1102 KV9000 Motor	4	M8511	
1935 3leaf propeller	8	M8512	4CW+4CCW
7.4V 400MAH battery	1	M8513	

1. Specification

Brand Name: Happymodel

Item Name: Mantis 85 Frame

Wheelbase:85mm

Size:85mm*85mm*28mm

Weight: 49g(battery not include)

Flight controller: Super_S F4 Flight controller

Motor: Happymodel SE1102 KV9000

Propeller: 1935 3leaf propeller



Camera: 5.8G VTX+Camera

Battery: 7.4V 400MAH battery

Firmware of Flight controller :Betaflight 3.2.0


Flight time : 4minutes

Buzzer

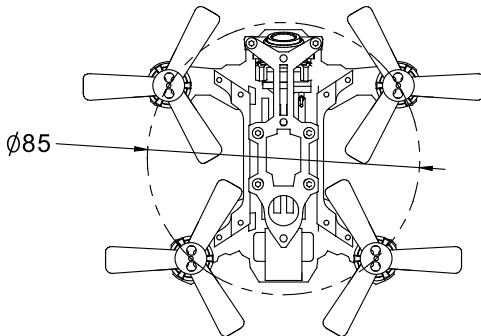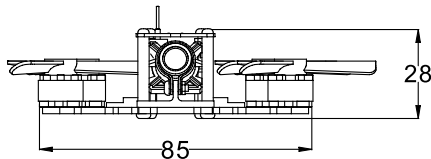

2. Components	QTY	Part NO
Mantis 85 Frame	1	M85F
Super_S F4 Flight controller	1	M8507
BS06D 4IN1 ESC	1	M8508
2.4G Receiver (Option: Frsky/Flysky/DSMX)	1	M8509(FR/FL/DX)
1102 KV9000 Motor	4	M8511
1935 3leaf propeller	8	M8512(R/L)
HC48D VTX&Camera	1	M8506
7.4V 400MAH 30C Lipo battery	1	M8513
Buzzer	1	M8510

3. Flight controller connection diagram

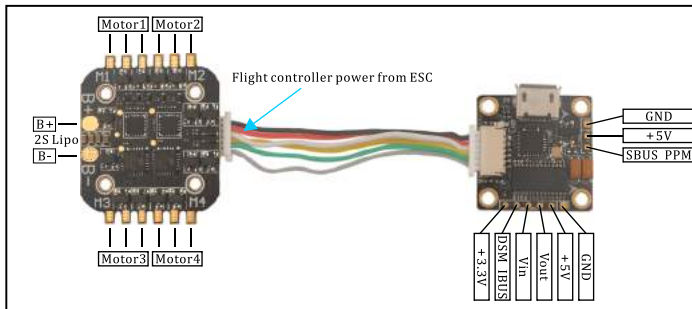

4. 5.8G VTX channels list

FR CH		FR					
		GA	GB	GC	GD	GE	GF
CH	CH1	5740MHz	5705MHz	5865MHz	5658MHz	5733MHz	5362MHz
	CH2	5760MHz	5685MHz	5845MHz	5695MHz	5752MHz	5399MHz
	CH3	5780MHz	5665MHz	5825MHz	5732MHz	5771MHz	5436MHz
	CH4	5800MHz	5645MHz	5805MHz	5769MHz	5790MHz	5473MHz
	CH5	5820MHz	5885MHz	5785MHz	5806MHz	5809MHz	5510MHz
	CH6	5840MHz	5905MHz	5765MHz	5843MHz	5828MHz	5547MHz
	CH7	5860MHz	5925MHz	5745MHz	5880MHz	5847MHz	5584MHz
	CH8	5880MHz	5945MHz	5725MHz	5917MHz	5866MHz	5621MHz

Yellow: Camera video signal

Green: Video out


Red: +5V

Black: GND





NTSC/PAL Switch
still touch up 2S;
Short touch switch
to reverse video display

Frequency
group A~F
selected still
touch up to 2S;
Channel ch1~ch8
selected with
short touch.

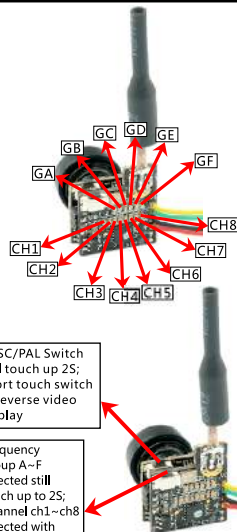


5. Frame type and ESC Connection diagram

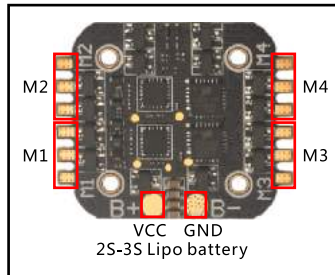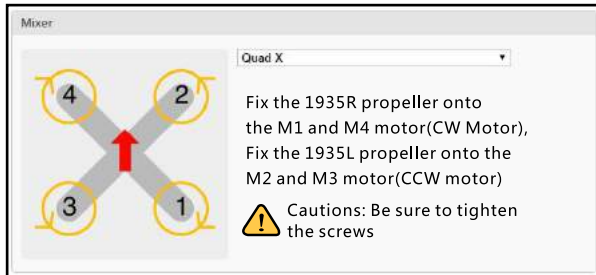




6. Charge the Battery

- First insert the LiPo battery balance plug into the B3 Compact charger.
- Connect the power-cable to the wall-outlet, the B3 Compact charger accept voltage from 110v to 240v. When correctly powered the charger LED will be flashing orange
- During charging the LED will be solid RED. When charging is completed, the charger will display as solid GREEN LED

Note: B3 Compact Charger is not include .


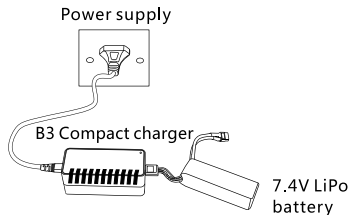


7. 2.4G Receiver connection diagram

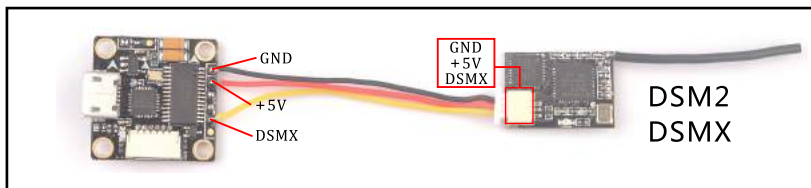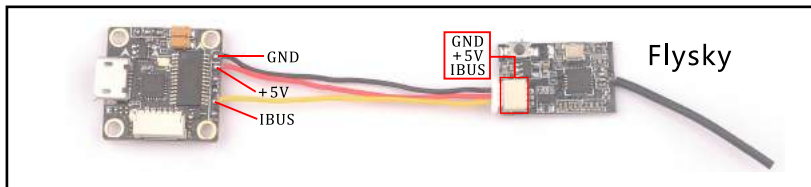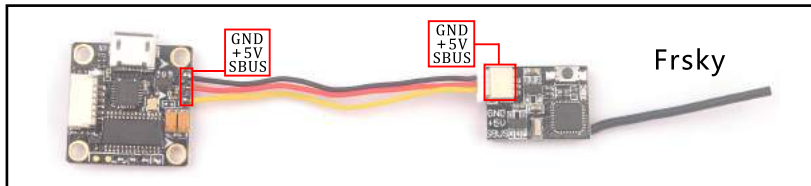


8. Mantis 85 Frsky BNF Version binding procedue

1.Plug USB of the Mantis 85 to computer while holding the bind button in the Frsky receiver, the green LED on the receiver will getting to be solid, this indicates the Mantis 85 is ready to bind to the transmitter, then release the bind button.

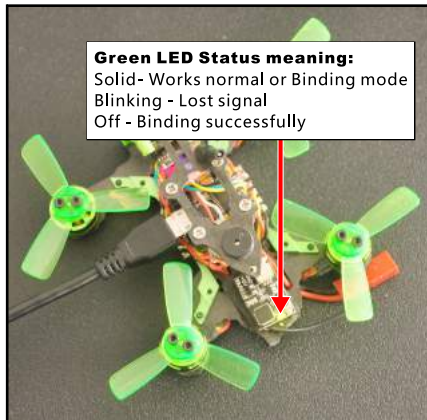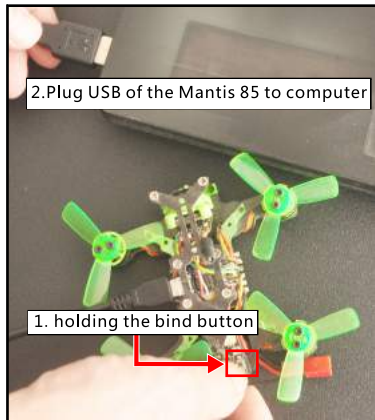

2. Turn on the transmitter and select D8 mode from the Model SETUP Tab, then go to the Receiver [Bind] tab and Enter to binding with the Mantis 85. The Green LED on the receiver should turning off ,this indicates binding successful.

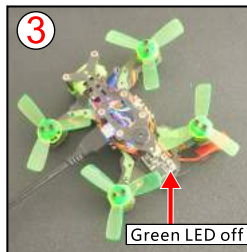

3.The Default channel map for Mantis 85 Frsky version is “TAER1234” , Please ensure your transmitter is matched with it ,otherwise it can't be armed. And the Channel9 was set for RSSI Output.

Notes: Please pay attention to the min Throttle of your transmitter, it should be less than the “Stick min” , so that you can arm the Quadcopter (For Example 1040<1100)

Receiver
WIKI

Please read receiver chapter of the documentation. Configure serial port (if required), receiver mode (serial/ppm/pwm), provider (for serial receivers), bind receiver, set channel map, configure channel endpoints/range on TX so that all channels go from ~1000 to ~2000. Set midpoint (default 1500), trim channels to 1500, configure stick deadband, verify behaviour when TX is off or out of range.
IMPORTANT: Before flying read failsafe chapter of documentation and configure failsafe.

Roll	1096	Channel Map	TAER1234		RSSI Channel	9	
Pitch	1501	Stick Min	1100	Stick Center	1500	Stick Max	1900
Yaw	1501	RC Deadband	0	Yaw Deadband	0	3D Throttle Deadband	50
Throttle	1040	RC Interpolation: Auto RC Interpolation					
AUX 1	987						
AUX 2	987						
AUX 3	987						
AUX 4	1501						
AUX 5	1880						
AUX 6	1498						
AUX 7	1498						
AUX 8	1498						
AUX 9	1498						
AUX 10	1498						

9. Arm/Disarm Mantis 85 Frsky BNF

1. The Default Arm/Disarm switch for Mantis 85 is AUX1(Channel 5),and you can also customize it with Betaflight Configurator. We also set the AUX2(Channel 6) for change flight mode and AUX3(Channel 7) for activate the buzzer which you can customize them too .

Modes

WIKI


Use ranges to define the switches on your transmitter and corresponding mode assignments. A receiver channel that gives a reading between a range min/max will activate the mode. Remember to save your settings using the Save button.

ARM Add Range	AUX 1 ▾ Min: 1400 Max: 2100		
AIR MODE Add Range	AUX 2 ▾ Min: 1525 Max: 2050		
ANGLE Add Range	AUX 2 ▾ Min: 1150 Max: 1500		

2. Set Arm/Disarm switch for your TARANIS X9D: Move to the MIXER interface, Set "SA" or "SB" switch etc. for Ch5 to ARM/DISARM the motor. Suggest use a 3-steps switch to change flight mode.



3. Toggle the AUX1 Switch , the buzzer starts beeps for one time and the Blue LED in the flight controller gets to be solid ,this indicates the motor was armed . And also you can found "Armed" shows on your FPV Goggles or the FPV Monitor. Be careful and enjoy your flight now !



Toggle the AUX1 Switch , the buzzer starts beeps one time and the Blue LED gets to be solid ,this indicates the motor was armed .

⚠ Cautions :

The motors will spinning low speed once the motors armed at Air mode.

10. Mantis 85 Frsky BNF version receiver configuration

We have configured the frsky receiver before shipping. If you flashed the new firmware , please set up as the following steps: Enable Serial RX for UART1 , then choose Serial_based receiver from the Receiver Mode tab ,and set the Serial Receiver Provider to SBUS Mode in Betaflight Configurator



Cautions :

Because of the Dual way transmission, please keep the Mantis 85 away from the radio more than 50cm, otherwise it will lost telemetry signal

Ports
WIKI

Note: not all combinations are valid. When the flight controller firmware detects this the serial port configuration will be reset.
Note: Do NOT disable MSP on the first serial port unless you know what you are doing. You may have to reflash and erase your configuration if you do.

Identifier	Configuration/MSP	Serial Rx	Telemetry Output	Sensor Input	Peripherals
USB VCP	<input checked="" type="checkbox"/> 115200 ▾	<input type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾
UART1	<input type="checkbox"/> 115200 ▾	<input checked="" type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾
UART3	<input type="checkbox"/> 115200 ▾	<input type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾
UART6	<input type="checkbox"/> 115200 ▾	<input type="checkbox"/>	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾	Disabled ▾ AUTO ▾

Receiver



Serial-based receiver (SPEKSAT, S ▾ Receiver Mode

Note: Remember to configure a Serial Port (via Ports tab) and choose a Serial Receiver Provider when using RX_SERIAL feature.


SBUS ▾ Serial Receiver Provider

11. Mantis 85 Flysky BNF Version binding procedue

1.Plug USB of the Mantis 85 to computer while holding the bind button on the Flysky receiver, the Blue LED on the receiver will getting to be blinking fast, this indicates the Mantis 85 is ready to bind to the transmitter, then release the bind button.

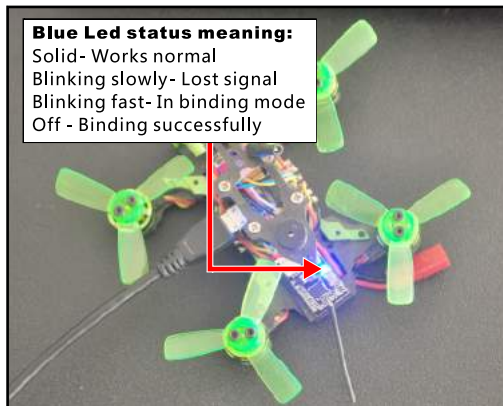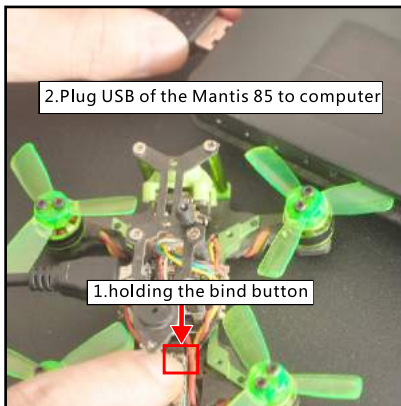

2. Please Ensure the RX setup of your transmitter is in AFHDS 2A Mode. Then get your transmitter into binding mode, Use Flysky I6 for an example: Turn on the transmitter while holding the bind button. The Blue LED in the receiver will turning off for a second and then starting to blinking slowly, this indicates binding successfully. Now you need to exit binding mode of the transmitter and re-connect the Mantis 85 to the computer, then the Blue LED should be solid , this indicates the connection was established between the Mantis 85 and your transmitter.

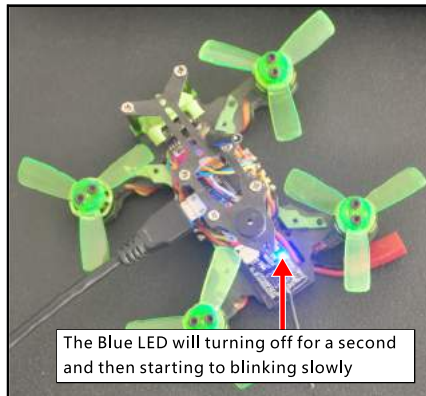

The Blue LED will turning off for a second and then starting to blinking slowly

3.The Default channel map for Mantis 85 Flysky version is “AETR1234” , Please ensure your transmitter is matched with it ,otherwise it can't be armed.

Notes: Please pay attention to the min Throttle of your transmitter, it should be less than the “Stick min” , so that you can arm the Quadcopter (For Example $1000 < 1100$)

Receiver
WIKI

Please read receiver chapter of the documentation. Configure serial port (if required), receiver mode (serial/ppm/pwm), provider (for serial receivers), bind receiver, set channel map, configure channel endpoints/range on TX so that all channels go from ~1000 to ~2000. Set midpoint (default 1500), trim channels to 1500, configure stick deadband, verify behaviour when TX is off or out of range.
IMPORTANT: Before flying read failsafe chapter of documentation and configure failsafe.

Roll	1500	Channel Map	AETR1234		RSSI Channel	Disabled	
Pitch	1503	Stick Min	1100	Stick Center	1500	Stick Max	1800
Yaw	1513	RC Deadband	0	Yaw Deadband	0	3D Throttle Deadband	0
Throttle	1000	RC Interpolation					Auto
AUX 1	1000						
AUX 2	1000						
AUX 3	1500						
AUX 4	1500						
AUX 5	1500						
AUX 6	1500						
AUX 7	1500						
AUX 8	1500						
AUX 9	1500						
AUX 10	1500						

12. Arm/Disarm Mantis 85 Flysky BNF Version

1.The Default Arm/Disarm switch for Mantis 85 is AUX1(Channel 5),and you can also customize it with Betaflight Configurator. We also set the AUX2(Channel 6) for change flight mode and AUX3(Channel 7) for activate the buzzer which you can customize them too .

Modes

WIKI


Use ranges to define the switches on your transmitter and corresponding mode assignments. A receiver channel that gives a reading between a range min/max will activate the mode. Remember to save your settings using the Save button.

ARM Add Range	AUX 1 ▾ Min: 1400 Max: 2100		✕
AIR MODE Add Range	AUX 2 ▾ Min: 1525 Max: 2050		✕
ANGLE Add Range	AUX 2 ▾ Min: 1150 Max: 1500		✕

2. Set Arm/Disarm switch for your Flysky Radio: Move to the Aux.channels interface, Set "SWA" or "SWB" or "SWC" switch etc. for Ch5 to ARM/DISARM the motor. Suggest use a 3-steps switch (like "SWC" of the Flysky I6) to change flight mode .



3. Toggle the AUX1 Switch , the buzzer starts beeps one time and the Blue LED in the flight controller gets to be solid , this indicates the motor was armed . And also you can found "Armed" shows on your FPV Goggles or the FPV Monitor. Be careful and enjoy your flight now !

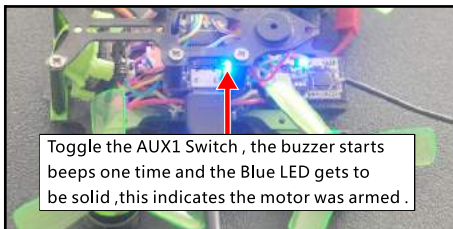

13. Mantis 85 Flysky version receiver configuration

We have configured the Flysky receiver before shipping. If you flashed the new firmware , please set up as the following steps: Enable Serial RX for UART1 , then choose Serial_based receiver from the Receiver Mode tab ,and set the Serial Receiver Provider to IBUS Mode in Betaflight Configurator

Ports

Wiki

Note: not all combinations are valid. When the flight controller firmware detects this the serial port configuration will be reset.

Note: Do **NOT** disable MSP on the first serial port unless you know what you are doing. You may have to reflash and erase your configuration if you do.

Identifier	Configuration/MSP	Serial Rx	Telemetry Output	Sensor Input	Peripherals
USB VCP	<input checked="" type="checkbox"/> 115200 ▼	<input type="checkbox"/>	Disabled ▼ AUTO ▼	Disabled ▼ AUTO ▼	Disabled ▼ AUTO ▼
UART1	<input type="checkbox"/> 115200 ▼	<input checked="" type="checkbox"/>	Disabled ▼ AUTO ▼	Disabled ▼ AUTO ▼	Disabled ▼ AUTO ▼
UART3	<input type="checkbox"/> 115200 ▼	<input type="checkbox"/>	Disabled ▼ AUTO ▼	Disabled ▼ AUTO ▼	Disabled ▼ AUTO ▼
UART6	<input type="checkbox"/> 115200 ▼	<input type="checkbox"/>	Disabled ▼ AUTO ▼	Disabled ▼ AUTO ▼	Disabled ▼ AUTO ▼

Receiver

Serial-based receiver (SPEKSAT, S ▼
Receiver Mode


Note: Remember to configure a Serial Port (via Ports tab) and choose a Serial Receiver Provider when using RX_SERIAL feature.

IBUS ▼
Serial Receiver Provider


14. Mantis 85 DSM2/DSMX BNF Version binding procedure and Satellite receiver setup

The Mantis 85 DSM2/X version comes with a BM01 binding module, the binding step is:

- 1.First remove the Receiver from Mantis 85
- 2.Connect the binding module and the receiver of the Mantis 85
- 3.For the DSMX Protocol Transmitter like DX9/DX8/DX7S/DX6, please just plug the USB of the binding module to computer or 5V power bank, the orange LED on the receiver will blinking fast, this indicates the receiver is in the DSMX protocol bind mode, turn on your transmitter and enter into binding mode , the orange LED should be solid once binding successful. If failed ,please Repeat the above steps

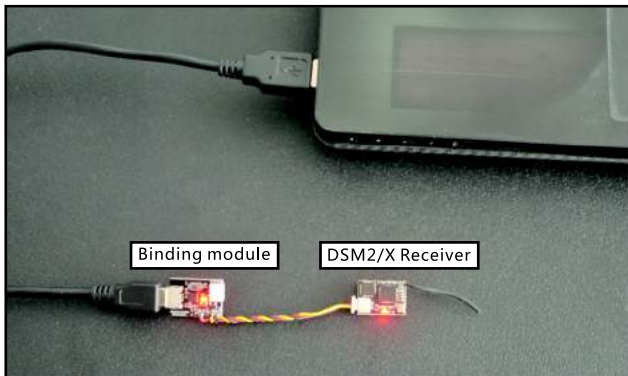

4. For the DSM2 Protocol Transmitter like DX7/DX6I, please plug the USB of the binding module to computer or 5V power bank while holding the button, the orange LED on the receiver will blinking fast, this indicates the receiver is in the DSM2 protocol bind mode, then release the button and turn on your transmitter and enter into binding mode, the orange LED should be solid once binding successful. If failed ,please Repeat the above steps

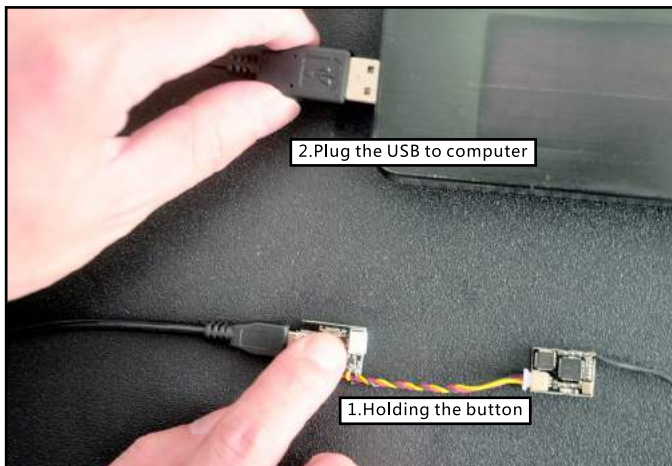

5.Reconnect the receiver to Mantis 85 after binding successfully

6.The Default channel map for Mantis 85 DSMX version is “TAER1234” , Please ensure your transmitter is matched with it ,otherwise it can't be armed.

Notes: Please pay attention to the min Throttle of your transmitter, it should be less than the “Stick min” , so that you can arm the Quadcopter (For Example $1040 < 1100$)

Receiver

WIKI

Please read receiver chapter of the documentation. Configure serial port (if required), receiver mode (serial/ppm/pwm), provider (for serial receivers), bind receiver, set channel map, configure channel endpoints/range on TX so that all channels go from ~1000 to ~2000. Set midpoint (default 1500), trim channels to 1500, configure stick deadband, verify behaviour when TX is off or out of range.

IMPORTANT: Before flying read failsafe chapter of documentation and configure failsafe.

Roll

1496

Pitch

1500

Yaw

1500

Throttle

1040

AUX 1

987

AUX 2

987

AUX 3

987

AUX 4

1501

AUX 5

1750

AUX 6

1520

AUX 7

1520

AUX 8

1520

AUX 9

1520

AUX 10

1520

Channel Map

TAER1234

RSSI Channel

Disabled

Stick Min

1100

Stick Center

1500

Stick Max

1900

RC Deadband

0

Yaw Deadband

0

3D Throttle Deadband

50

RC Interpolation

Auto

RC Interpolation

15. Arm/Disarm Mantis 85 DSM2/DSMX BNF version


1. The Default Arm/Disarm switch for Mantis 85 DSM2/DSMX BNF Version is AUX1(Channel 5), for most of Spektrum radio the default channel 5 is Gear switch and you can also customize it with Betaflight Configurator. We also set the AUX2(Channel 6) for change flight mode and AUX3(Channel 7) for activate the buzzer which you can customize them too. Suggest use a 3-steps switch to change flight mode.

The screenshot shows the 'Modes' configuration page in Betaflight. It features a yellow header with the title 'Modes' and a 'WIKI' button. Below the header is a yellow instruction box: 'Use ranges to define the switches on your transmitter and corresponding mode assignments. A receiver channel that gives a reading between a range min/max will activate the mode. Remember to save your settings using the Save button.' The main area contains three mode configuration sections, each with a dropdown menu, a range slider, and an 'Add Range' button. The 'ARM' section is set to 'AUX 1' with a range from 1400 to 2100. The 'AIR MODE' section is set to 'AUX 2' with a range from 1525 to 2050. The 'ANGLE' section is also set to 'AUX 2' with a range from 1150 to 1500. Each slider has a scale from 900 to 2100 with major ticks every 100 units.

Mode	AUX Channel	Min	Max
ARM	AUX 1	1400	2100
AIR MODE	AUX 2	1525	2050
ANGLE	AUX 2	1150	1500


2. Turn on the transmitter and set a switch for Ch5 to ARM/DISARM the motor, some transmitter use SPEKTRUM DX6/DX6I, the default Ch5 is GEAR Switch.

3. Toggle the AUX1 Switch , the buzzer starts beeps one time and the Blue LED gets to be solid ,this indicates the motor was armed . And also you can found "Armed" shows on your FPV Goggles or the FPV Monitor. Be careful and enjoy your flight now !

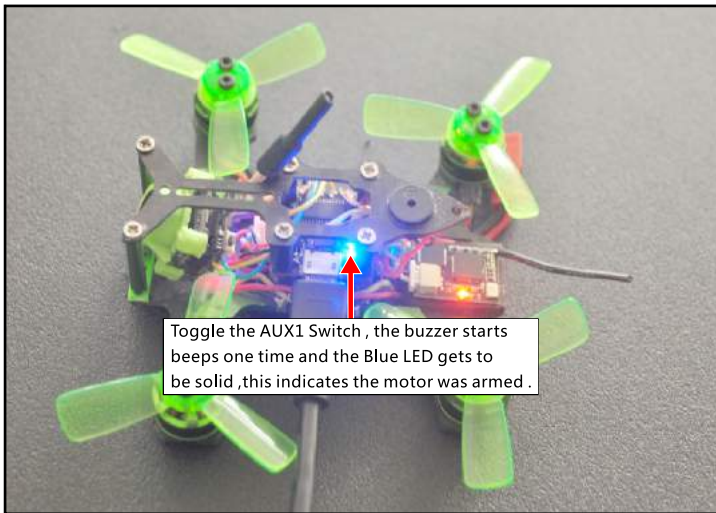

16. Mantis 85 DSM2/DSMX BNF version receiver configuration

We have configured the DSM2/DSMX before shipping. If you flashed the new firmware , please set up as the following steps: Enable Serial RX for UART1 , then choose Serial_based receiver from the Receiver Mode tab ,and set the Serial Receiver Provider to SPEKTRUM2048 for DSMX Protocol and SPEKTRUM1024 for DSM2 Protocol in Betaflight Configurator

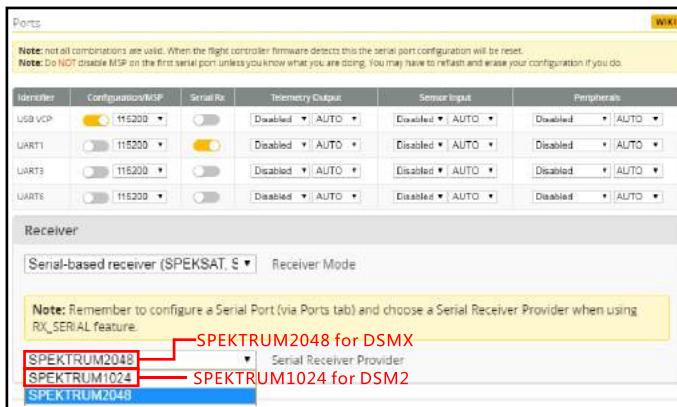


17. OSD configuration

1. Connect the Mantis 85 to the computer , open Betaflight Configurator , move to the OSD option, then you can configure the layout of the OSD.




2. OSD change font layout

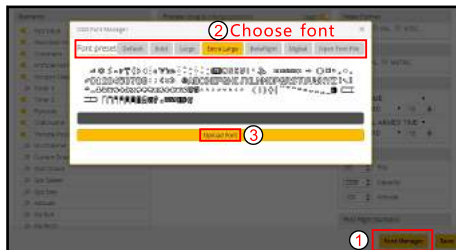

18. Flight controller firmware update

Firmware update:

- 1.Install latest STM32 Virtual COM Port Driver<http://www.st.com/web/en/catalog/tools/PF2579382>
- 2.Install STM BOOTLOAD Driver (STM Devicein DFU MODE)
- 3.Open Betaflight configurator and choosefirmware target "OMNIBUS F4SD" ,then select thefirmware version.
- 4.There are 2 ways to get in DFU Mode: 1).solder the boot pad and then plug USB to comuper 2).loading betaflight firmware and hit "flash" , then it will getting into DFU Mode automatically.
- 5.Open Zadig tools to replace the driversfrom STM32 Bootloader to WINUSB Driver .

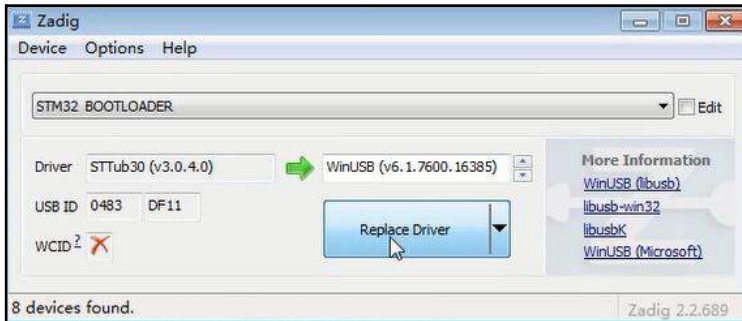

- 6.Reconnect the flight controller to thecomputer after done the driver replacement , and open Betaflight configurator, loading firmware and click flash.



www.happymodel.cn

*User manual is subject to change without prior notice.