









Smart Controller Board



- Bec: 5V@ 1.5A
- Power input : 2S-6S
- With 4 LED line outputs (30 LED/line)
- Weight: 2.2 g
- WxLxH: 16x22x7 mm
- Configure with: App, Tx, Button

Pinout:

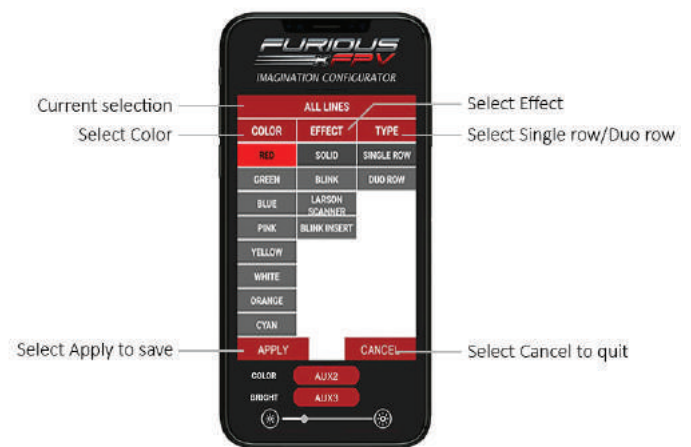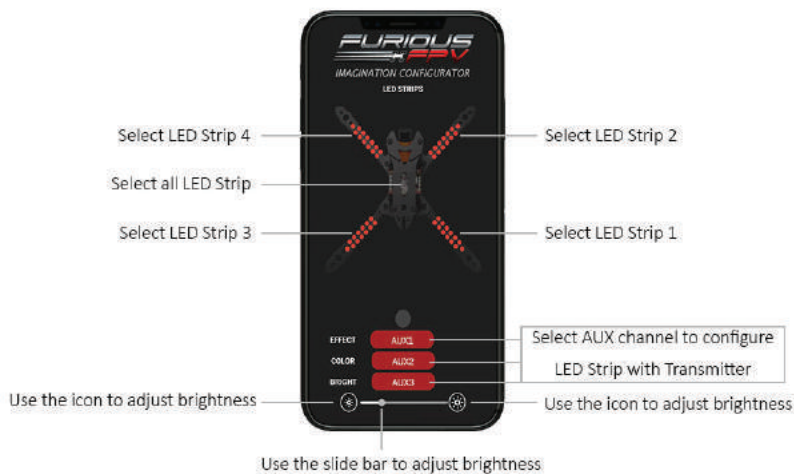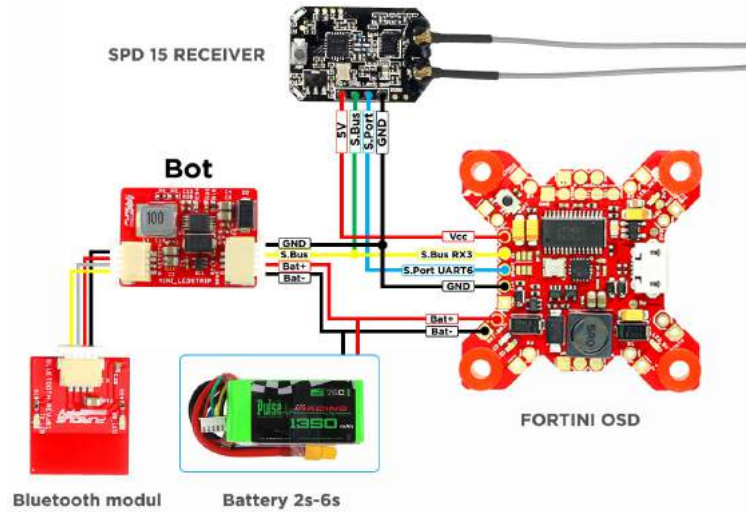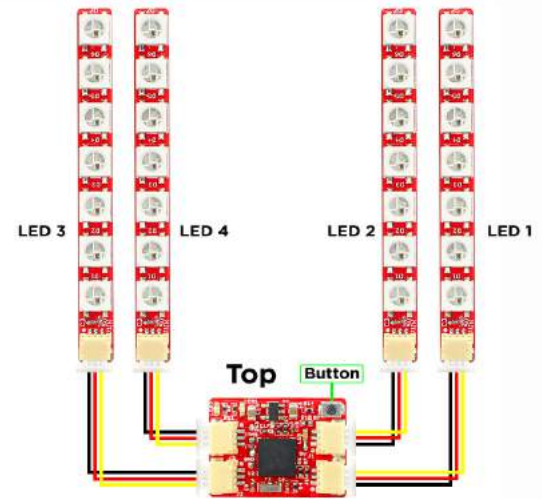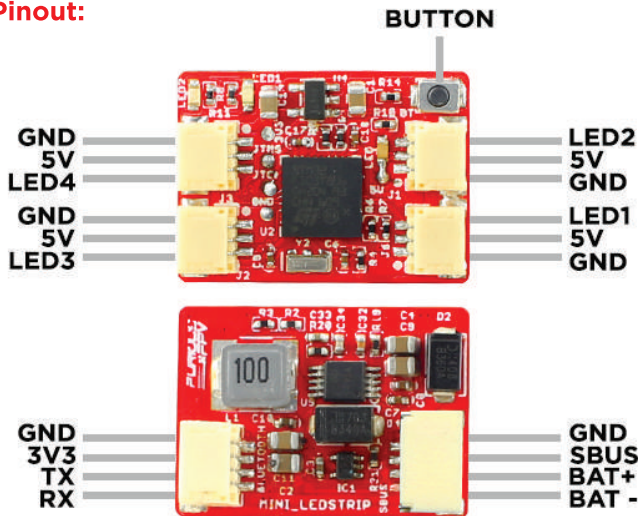

Download app:



iOS


iOS 10.0 or higher



Android 5.0 or higher

Diagram: Using button for setting LED Strip

*Press > 10s to reset default

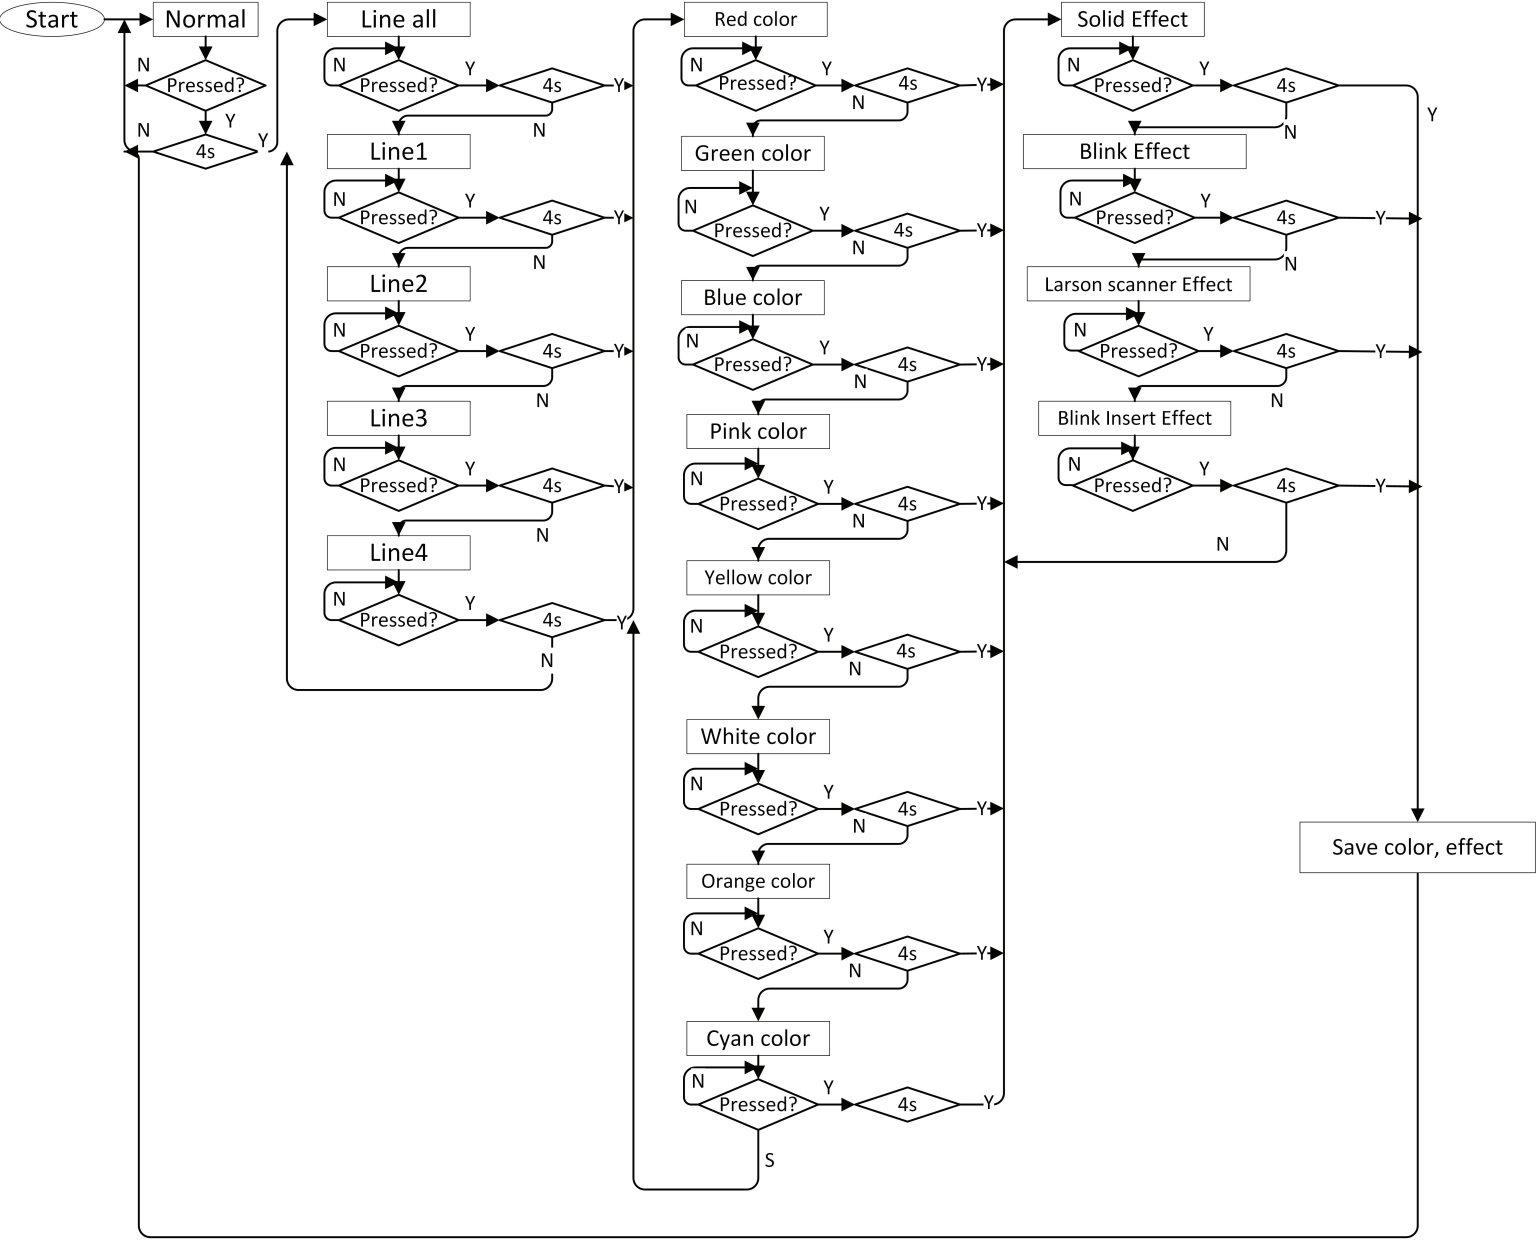

LED blink codes for Line, Color, Effect:

Model	Green	Blue
Normal	1	1
Line selection	1	2
Color selection	1	3
Effect selection	1	4

Pressed button: only Green light blink

Pressed and hold button for 4s: both Green and Blue lights blink

Reset default: (hold button >10s) Green and Blue fast blink 4 times

Color1

Color2

Color3

Color4

Color5

Color6

Color7

Color8

Effect1: Solid

Effect2: Blink

Effect3: Larson scanner

Effect4: Blink insert

Changes indicated by LED blinking

Please contact our technical support via:

tech@furiousfpv.com

for information related to technical issues