




A. Features

- 6 Digits LCD Display, Display Hour ,Minute ,Second ,Month ,Day and Week
- Daily Alarm and Chime hourly
- Snooze
- 12 / 24H format selectable
- 1/100 second Chronograph with split functions
- EL backlight

B. Operational Manual

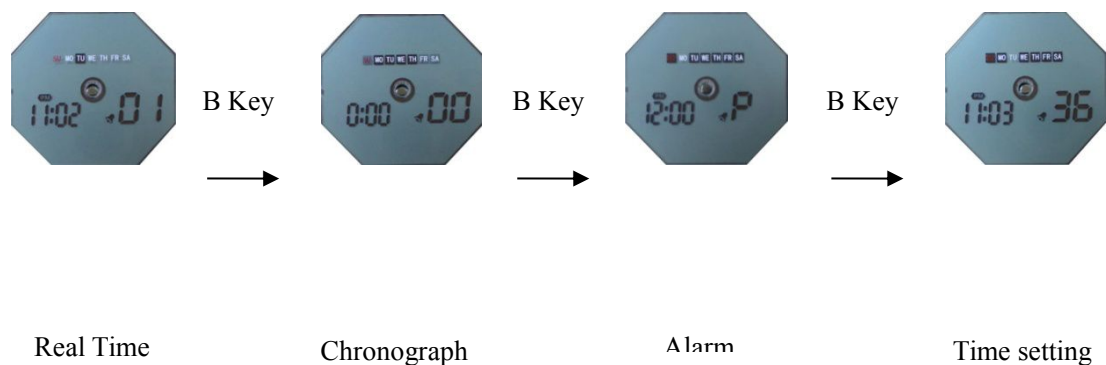

1. At any state ,press A key EL backlight for 3s .

2. Real Time

- Press C key to display Alarm ;Press D key to display Date .
- Turn On / Off Alarm and Chime
 - a). Press C + D key to turn on / off Alarm ,indicator “ 📣 ”displaying for On .
 - b). Press C + B key to turn On / Off Chime ,all days of week displaying for On .

3. Chronograph

- The display range of the Chronograph is 23 hours ,59 minutes ,59.99 seconds.
- Press D key to Start/Stop running ;
- When stop ,press C key to zero .

- When running ,press C key to split count.
- Then press D key to exit split count ,and stop counting ;
- When exit split count ,press C key to display all counts ; and press C key again to zero ;
- When running ,press B key to return to Real Time Mode ,and it running at back .

4. Daily Alarm

- "Hour " flashing once entry Daily Alarm .
- Press C key to select "Hour " or "Minute "setting
- Press D key to adjust the flashing item
- Press C key to confirm
- Press B key to return to Real Time mode
- Alarm Snooze ON/OFF

At Alarm sounding state ,press C key to stop sounding ,and press D key to ON/OFF snooze function .When Snooze function be ON ,it will sound five minutes later ,and auto stop after sounding for a minute .

5. Time Setting

"Second " flashing when loading ,press D key to zero ; Press C key to select item as following sequence :

Minute → Hour → Day → Month → Week

- Press D key to adjust the flashing item.
- When setting "Hour " ," H " display for 2 4 H format ;" A " or " P " for 1 2 H format .

C. Specifications

- | | |
|-------------------------------------|---|
| | : $\Phi 36.20\text{mm}$ |
| ➤ Module Size | : 8.85mm |
| ➤ Module Thickness (include buzzer) | : $-10^{\circ}\text{C}\sim 60^{\circ}\text{C}$ |
| ➤ Operational Temperature Range | : 3.0V |
| ➤ Operational Voltage | : $\pm 30\text{sec/month}$ |
| ➤ Accuracy | : CR2025(capacitance: 170m Ah) |
| ➤ Battery Code | : $\leq 2.56\mu\text{A}$ (static maximum current : 3.5uA) |
| ➤ static average current | : $\leq 2.01\text{mA}$ (Alarm maximum current : 8.0mA) |
| ➤ Alarm average current | : $\leq 8.07\text{mA}$ (ELlighten maximum current : 10mA) |
| ➤ EL lighten average current | : ≥ 24 month(Japan Lithium) |
| ➤ Battery life (90%) | |

(Battery life calculate according to EL lighten four time each day for 3 second each time , alarm for 60 seconds each day)

